




CATENE A RULLI CON ATTACCHI VERTICALI - DIN 8187 - ISO 606

ROLLER CHAINS WITH VERTICAL ATTACHMENTS - DIN 8187 - ISO 606

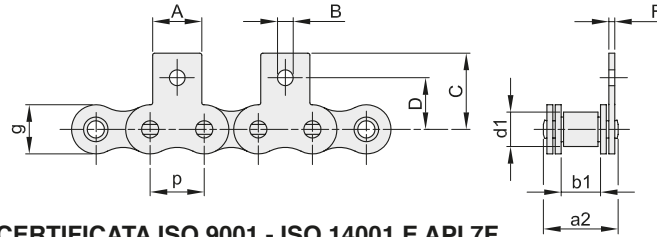

M1/02


CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS

CONFEZIONE DA 5 MT



| ISO | codice | p | | b ₁ mm min. | d ₁ mm max. | a ₂ mm max. | g mm max. | A mm | B mm | C mm max. | D mm | F mm | Carico di rottura | | q kg/m ≈ |
|-------|-----------|--------|------|------------------------------|------------------------------|------------------------------|-----------------|---------|---------|-----------------|---------|---------|-------------------|-------------|----------------|
| | | mm | inch | | | | | | | | | | minimo KN | medio KN | |
| 06B-1 | 603109112 | 9,525 | 3/8" | 5,72 | 6,35 | 13,5 | 8,26 | 8,0 | 3,5 | 13,5 | 9,5 | 1,03 | 9,0 | 10,7 | 0,46 |
| 08B-1 | 603112112 | 12,7 | 1/2" | 7,75 | 8,51 | 17,0 | 11,81 | 9,5 | 4,3 | 18,4 | 14,1 | 1,40 | 18,0 | 21,1 | 0,77 |
| 10B-1 | 603115112 | 15,875 | 5/8" | 9,65 | 10,16 | 19,6 | 14,73 | 14,1 | 5,2 | 24,7 | 15,9 | 1,63 | 22,4 | 27,4 | 1,04 |
| 12B-1 | 603119112 | 19,05 | 3/4" | 11,68 | 12,07 | 22,7 | 16,13 | 15,8 | 5,6 | 26,6 | 17,9 | 1,80 | 29,0 | 32,3 | 1,35 |
| 16B-1 | 603125112 | 25,4 | 1" | 17,02 | 15,88 | 36,1 | 21,08 | 19,0 | 6,8 | 35,0 | 26,0 | 3,00 | 60,0 | 70,6 | 2,83 |

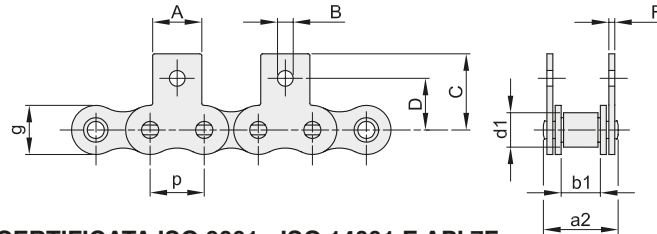

MK1/02


CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS

CONFEZIONE DA 5 MT



| ISO | codice | p | | b ₁ mm min. | d ₁ mm max. | a ₂ mm max. | g mm max. | A mm | B mm | C mm max. | D mm | F mm | Carico di rottura | | q kg/m ≈ |
|-------|-----------|--------|------|------------------------------|------------------------------|------------------------------|-----------------|---------|---------|-----------------|---------|---------|-------------------|-------------|----------------|
| | | mm | inch | | | | | | | | | | minimo KN | medio KN | |
| 06B-1 | 603109212 | 9,525 | 3/8" | 5,72 | 6,35 | 13,5 | 8,26 | 8,0 | 3,5 | 13,5 | 9,5 | 1,03 | 9,0 | 10,7 | 0,51 |
| 08B-1 | 603112212 | 12,7 | 1/2" | 7,75 | 8,51 | 17,0 | 11,81 | 9,5 | 4,3 | 18,4 | 14,1 | 1,40 | 18,0 | 21,1 | 0,85 |
| 10B-1 | 603115212 | 15,875 | 5/8" | 9,65 | 10,16 | 19,6 | 14,73 | 14,1 | 5,2 | 24,7 | 15,9 | 1,63 | 22,4 | 27,4 | 1,13 |
| 12B-1 | 603119212 | 19,05 | 3/4" | 11,68 | 12,07 | 22,7 | 16,13 | 15,8 | 5,6 | 26,6 | 17,9 | 1,80 | 29,0 | 32,3 | 1,45 |
| 16B-1 | 603125212 | 25,4 | 1" | 17,02 | 15,88 | 36,1 | 21,08 | 19,0 | 6,8 | 35,0 | 26,0 | 3,00 | 60,0 | 70,6 | 3,48 |

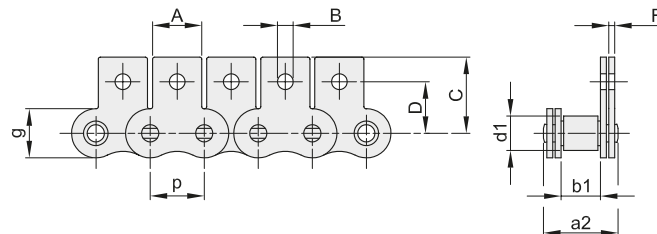

M1/01

CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS

CONFEZIONE DA 5 MT



| ISO | codice | p | | b ₁ mm min. | d ₁ mm max. | a ₂ mm max. | g mm max. | A mm | B mm | C mm max. | D mm | F mm | Carico di rottura | | q kg/m ≈ |
|-------|-----------|--------|------|------------------------------|------------------------------|------------------------------|-----------------|---------|---------|-----------------|---------|---------|-------------------|-------------|----------------|
| | | mm | inch | | | | | | | | | | minimo KN | medio KN | |
| 06B-1 | 603109111 | 9,525 | 3/8" | 5,72 | 6,35 | 13,5 | 8,26 | 8,0 | 3,5 | 13,5 | 9,5 | 1,03 | 9,0 | 10,7 | 0,51 |
| 08B-1 | 603112111 | 12,7 | 1/2" | 7,75 | 8,51 | 17,0 | 11,81 | 9,5 | 4,3 | 18,4 | 14,1 | 1,40 | 18,0 | 21,1 | 0,85 |
| 10B-1 | 603115111 | 15,875 | 5/8" | 9,65 | 10,16 | 19,6 | 14,73 | 14,1 | 5,2 | 24,7 | 15,9 | 1,63 | 22,4 | 27,4 | 1,13 |
| 12B-1 | 603119111 | 19,05 | 3/4" | 11,68 | 12,07 | 22,7 | 16,13 | 15,8 | 5,6 | 26,6 | 17,9 | 1,80 | 29,0 | 32,3 | 1,45 |
| 16B-1 | 603125111 | 25,4 | 1" | 17,02 | 15,88 | 36,1 | 21,08 | 19,0 | 6,8 | 35,0 | 26,0 | 3,00 | 60,0 | 70,6 | 3,48 |