



# CINGHIE DENTATE “HL/CXA” PER ALTI CARICHI “HL/CXA” TIMING BELTS FOR HIGH TORQUE LEVELS

## CINGHIE DENTATE AD ALTA EFFICIENZA PER LA TRASMISSIONE CONTINUA DI ALTE COPPIE MECCANICHE A BASSE VELOCITÀ



HEAVY-DUTY TIMING BELTS FOR SUSTAINED TRANSMISSION  
OF HIGH TORQUE LEVELS AT LOW SPEED

### Proprietà


- › Resistenti a temperature comprese tra -20°C e +100°C in funzione dell'applicazione
- › Elettricamente conduttrici a norma ISO 9563
- › Relativamente resistenti all'olio
- › Resistenti all'ozono
- › Utilizzabili in climi tropicali
- › Resistenti all'invecchiamento
- › Idonee per lavorare anche sulla parte esterna con galoppino
- › Non necessitano di manutenzione

### Properties

- › Temperature range from -20 °C to +100 °C depending on application
- › Electrically conductive in accordance with ISO 9563
- › Conditionally resistant to oil
- › Ozone-resistant
- › Suitable for tropical climates
- › Resistant to aging
- › Suitable for reverse flexing/reverse tensioning idlers
- › Maintenance-free

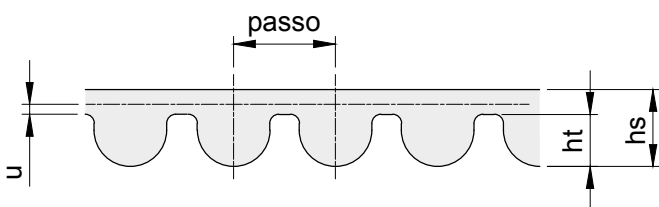

**HTD**

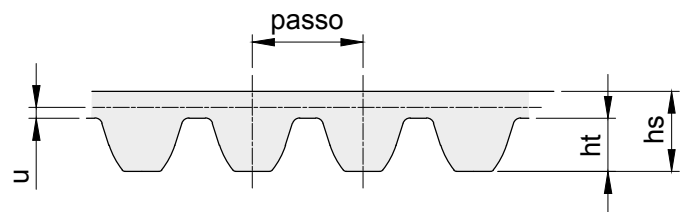

**STD**



### DIMENSIONI CINGHIA DIMENSIONS OF BELT

descrizione	passo mm	hs mm	ht mm	u mm
HTD 8M	8	5,60	3,40	0,686
HTD 14M	14	10,00	6,00	1,395
STD 8M	8	5,20	3,00	0,686




# CINGHIE DENTATE "HL/CXA" PER ALTI CARICHI

## "HL/CXA" TIMING BELTS FOR HIGH TORQUE LEVELS

### HTD 8M HL/CXA

PASSO 8 mm

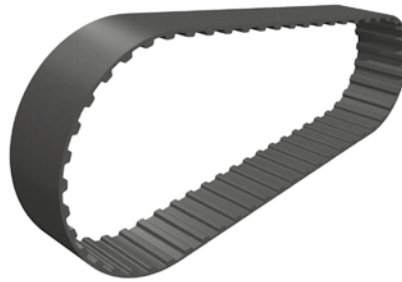

Materiale: Neoprene

descrizione	denti	sviluppo mm	cod. HTD 8M HL/CXA larghezza 20 mm	cod. HTD 8M HL/CXA larghezza 30 mm	cod. HTD 8M HL/CXA larghezza 50 mm	cod. HTD 8M HL/CXA larghezza 85 mm
480 8M HL/CXA	60	480	HL1420200480	HL1420300480	HL1420500480	HL1420850480
560 8M HL/CXA	70	560	HL1420200560	HL1420300560	HL1420500560	HL1420850560
720 8M HL/CXA	90	720	HL1420200720	HL1420300720	HL1420500720	HL1420850720
800 8M HL/CXA	100	800	HL1420200800	HL1420300800	HL1420500800	HL1420850800
880 8M HL/CXA	110	880	HL1420200880	HL1420300880	HL1420500880	HL1420850880
1040 8M HL/CXA	130	1040	HL1420201040	HL1420301040	HL1420501040	HL1420851040
1120 8M HL/CXA	140	1120	HL1420201120	HL1420301120	HL1420501120	HL1420851120
1200 8M HL/CXA	150	1200	HL1420201200	HL1420301200	HL1420501200	HL1420851200
1424 8M HL/CXA	178	1424	HL1420201424	HL1420301424	HL1420501424	HL1420851424
1440 8M HL/CXA	180	1440	HL1420201440	HL1420301440	HL1420501440	HL1420851440
1800 8M HL/CXA	225	1800	HL1420201800	HL1420301800	HL1420501800	HL1420851800
2000 8M HL/CXA	250	2000	HL1420202000	HL1420302000	HL1420502000	HL1420852000