



CINGHIE DENTATE “HL/CXA” PER ALTI CARICHI “HL/CXA” TIMING BELTS FOR HIGH TORQUE LEVELS

CINGHIE DENTATE AD ALTA EFFICIENZA PER LA TRASMISSIONE CONTINUA DI ALTE COPPIE MECCANICHE A BASSE VELOCITÀ



HEAVY-DUTY TIMING BELTS FOR SUSTAINED TRANSMISSION
OF HIGH TORQUE LEVELS AT LOW SPEED

Proprietà


- › Resistenti a temperature comprese tra -20°C e +100°C in funzione dell'applicazione
- › Elettricamente conduttrici a norma ISO 9563
- › Relativamente resistenti all'olio
- › Resistenti all'ozono
- › Utilizzabili in climi tropicali
- › Resistenti all'invecchiamento
- › Idonee per lavorare anche sulla parte esterna con galoppino
- › Non necessitano di manutenzione

Properties

- › Temperature range from -20 °C to +100 °C depending on application
- › Electrically conductive in accordance with ISO 9563
- › Conditionally resistant to oil
- › Ozone-resistant
- › Suitable for tropical climates
- › Resistant to aging
- › Suitable for reverse flexing/reverse tensioning idlers
- › Maintenance-free

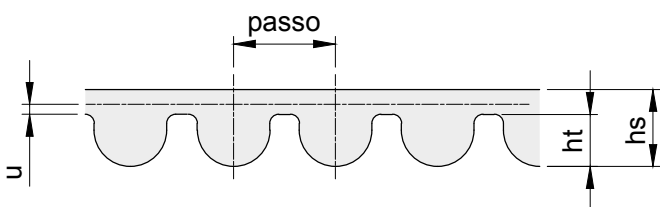

HTD

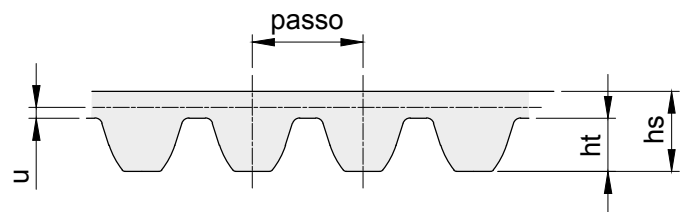

STD



DIMENSIONI CINGHIA DIMENSIONS OF BELT


descrizione	passo mm	hs mm	ht mm	u mm
HTD 8M	8	5,60	3,40	0,686
HTD 14M	14	10,00	6,00	1,395
STD 8M	8	5,20	3,00	0,686



CINGHIE DENTATE "HL/CXA" PER ALTI CARICHI

"HL/CXA" TIMING BELTS FOR HIGH TORQUE LEVELS

STD 8M HL/CXA
PASSO 8 mm

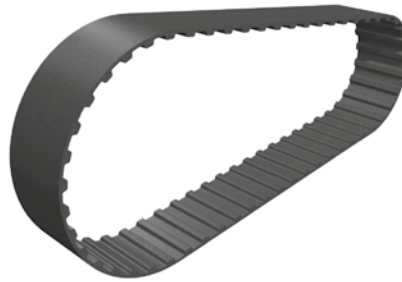

Materiale: Neoprene

descrizione	denti	sviluppo mm	cod. STD S8M HL/CXA larghezza 20 mm	cod. STD S8M HL/CXA larghezza 30 mm	cod. STD S8M HL/CXA larghezza 50 mm	cod. STD S8M HL/CXA larghezza 85 mm
688 S8M HL/CXA	86	688	HL1440200688	HL1440300688	HL1440500688	HL1440850688
760 S8M HL/CXA	95	760	HL1440200760	HL1440300760	HL1440500760	HL1440850760
848 S8M HL/CXA	106	848	HL1440200848	HL1440300848	HL1440500848	HL1440850848
880 S8M HL/CXA	110	880	HL1440200880	HL1440300880	HL1440500880	HL1440850880