CINGHIA DENTATA CON AUTO-TRACKING PER UN FUNZIONAMENTO MOLTO SILENZIOSO E VIBRAZIONI RIDOTTE; SCELTA ECCELLENTE PER AZIONAMENTI ORIZZONTALI

SELF-TRACKING TIMING BELT MADE FOR VERY QUIET AND REDUCED VIBRATION OPERATION, EXCELLENT CHOICE FOR HORIZONTAL DRIVES.

Proprietà

- Resistenti a temperature comprese tra -30°C e +130 °C in funzione dell’applicazione
- Molto silenziose
- Elettricamente conduttrici a norma ISO 9563
- Relativamente resistenti all'olio
- Resistenti all’ozono
- Resistenti all’invecchiamento
- Non necessitano di manutenzione
- Povere di vibrazioni


CONTI® SilentSync




H.O.T (Helical Offset Tooth / Dentatura elicoidale)

Properties

- Temperature range from -30°C to +130°C, depending on application
- Very low-noise
- Electrically conductive in accordance with ISO 9563
- Conditionally resistant to oil
- Ozone-resistant
- Resistant to aging
- Maintenance-free
- Low vibration

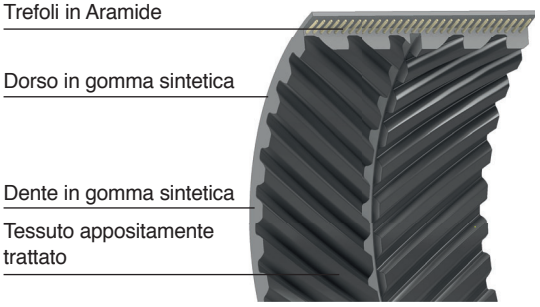

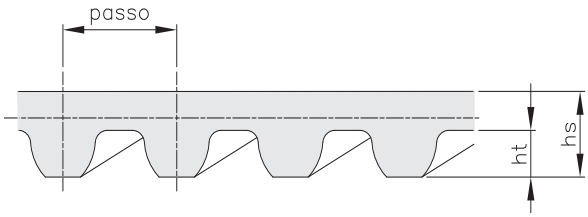

DIMENSIONI CINGHIA
DIMENSIONS OF BELT

Continental ContiTech


descrizione	passo mm	hs mm	ht mm
H.O.T. 8M	8	5,5	3,00
H.O.T. 14M	14	9,1	5,30

H.O.T. 14M

PASSO 14 mm



Continental ContiTech

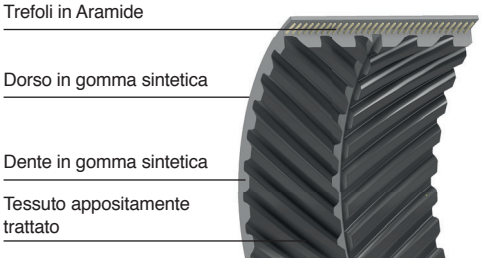

Materiale: Gomma sintetica

descrizione	denti	sviluppo mm	codice BLUE larghezza 35 mm	codice GREEN larghezza 52,5 mm	codice ORANGE larghezza 70 mm	codice RED larghezza 105 mm
HOT 14M 994	71	994	SSB0994	*SSG0994		
HOT 14M 1120	80	1120	SSB1120	*SSG1120	*SSO1120	
HOT 14M 1190	85	1190	SSB1190	*SSG1190	*SSO1190	
HOT 14M 1260	90	1260	SSB1260	*SSG1260	*SSO1260	*SSR1260
HOT 14M 1400	100	1400	SSB1400	*SSG1400	*SSO1400	*SSR1400
HOT 14M 1568	112	1568	SSB1568	*SSG1568	*SSO1568	*SSR1568
HOT 14M 1750	125	1750	SSB1750	*SSG1750	*SSO1750	*SSR1750
HOT 14M 1960	140	1960	SSB1960	*SSG1960	*SSO1960	*SSR1960
HOT 14M 2100	150	2100	SSB2100	*SSG2100	*SSO2100	*SSR2100
HOT 14M 2240	160	2240	SSB2240	*SSG2240	*SSO2240	*SSR2240
HOT 14M 2380	170	2380	SSB2380	*SSG2380	*SSO2380	*SSR2380
HOT 14M 2520	180	2520	SSB2520	*SSG2520	*SSO2520	*SSR2520
HOT 14M 2660	190	2660	SSB2660	*SSG2660	*SSO2660	*SSR2660
HOT 14M 2800	200	2800	*SSB2800	*SSG2800	*SSO2800	*SSR2800
HOT 14M 3136	224	3136	*SSB3136	*SSG3136	*SSO3136	*SSR3136
HOT 14M 3304	236	3304	*SSB3304	*SSG3304	*SSO3304	*SSR3304
HOT 14M 3500	250	3500	*SSB3500	*SSG3500	*SSO3500	*SSR3500
HOT 14M 3920	280	3920	*SSB3920	*SSG3920	*SSO3920	*SSR3920

* Fornita su richiesta / Supplied on request